EIGUIZER

HOMEPOWER

Power you can count on.



Features & Benefits

- Compact All-In-One Battery Energy Storage System
- 6.1kWh expandable up to 24.4kWh
- AC Coupled for both new and retrofitted installations
- 3.6kW charge and discharge rate
- Built-in blackout protection (UPS)
- 24x7 connectivity via Cellular / Wifi / Ethernet

- DRED device support: DRM 0-8
- Virtual Power Plant ready

 Customisable EMS (Energy Management System) for different applications 24x7 monitoring through our web portal and user app (iOS & Android) Patented Magna-Flap conceals system controls and installer access panel Suitable for both indoor and outdoor installation (IP65 rating)





System Map

CLOUD

WEB PORTAL

APP INTERNET CONNECTION 4G / Wi-Fi / ETHERNET CT Length: 10m Max Length: 100m Energizer. UTILITY METER HOMEPOWER GRID CT GRID

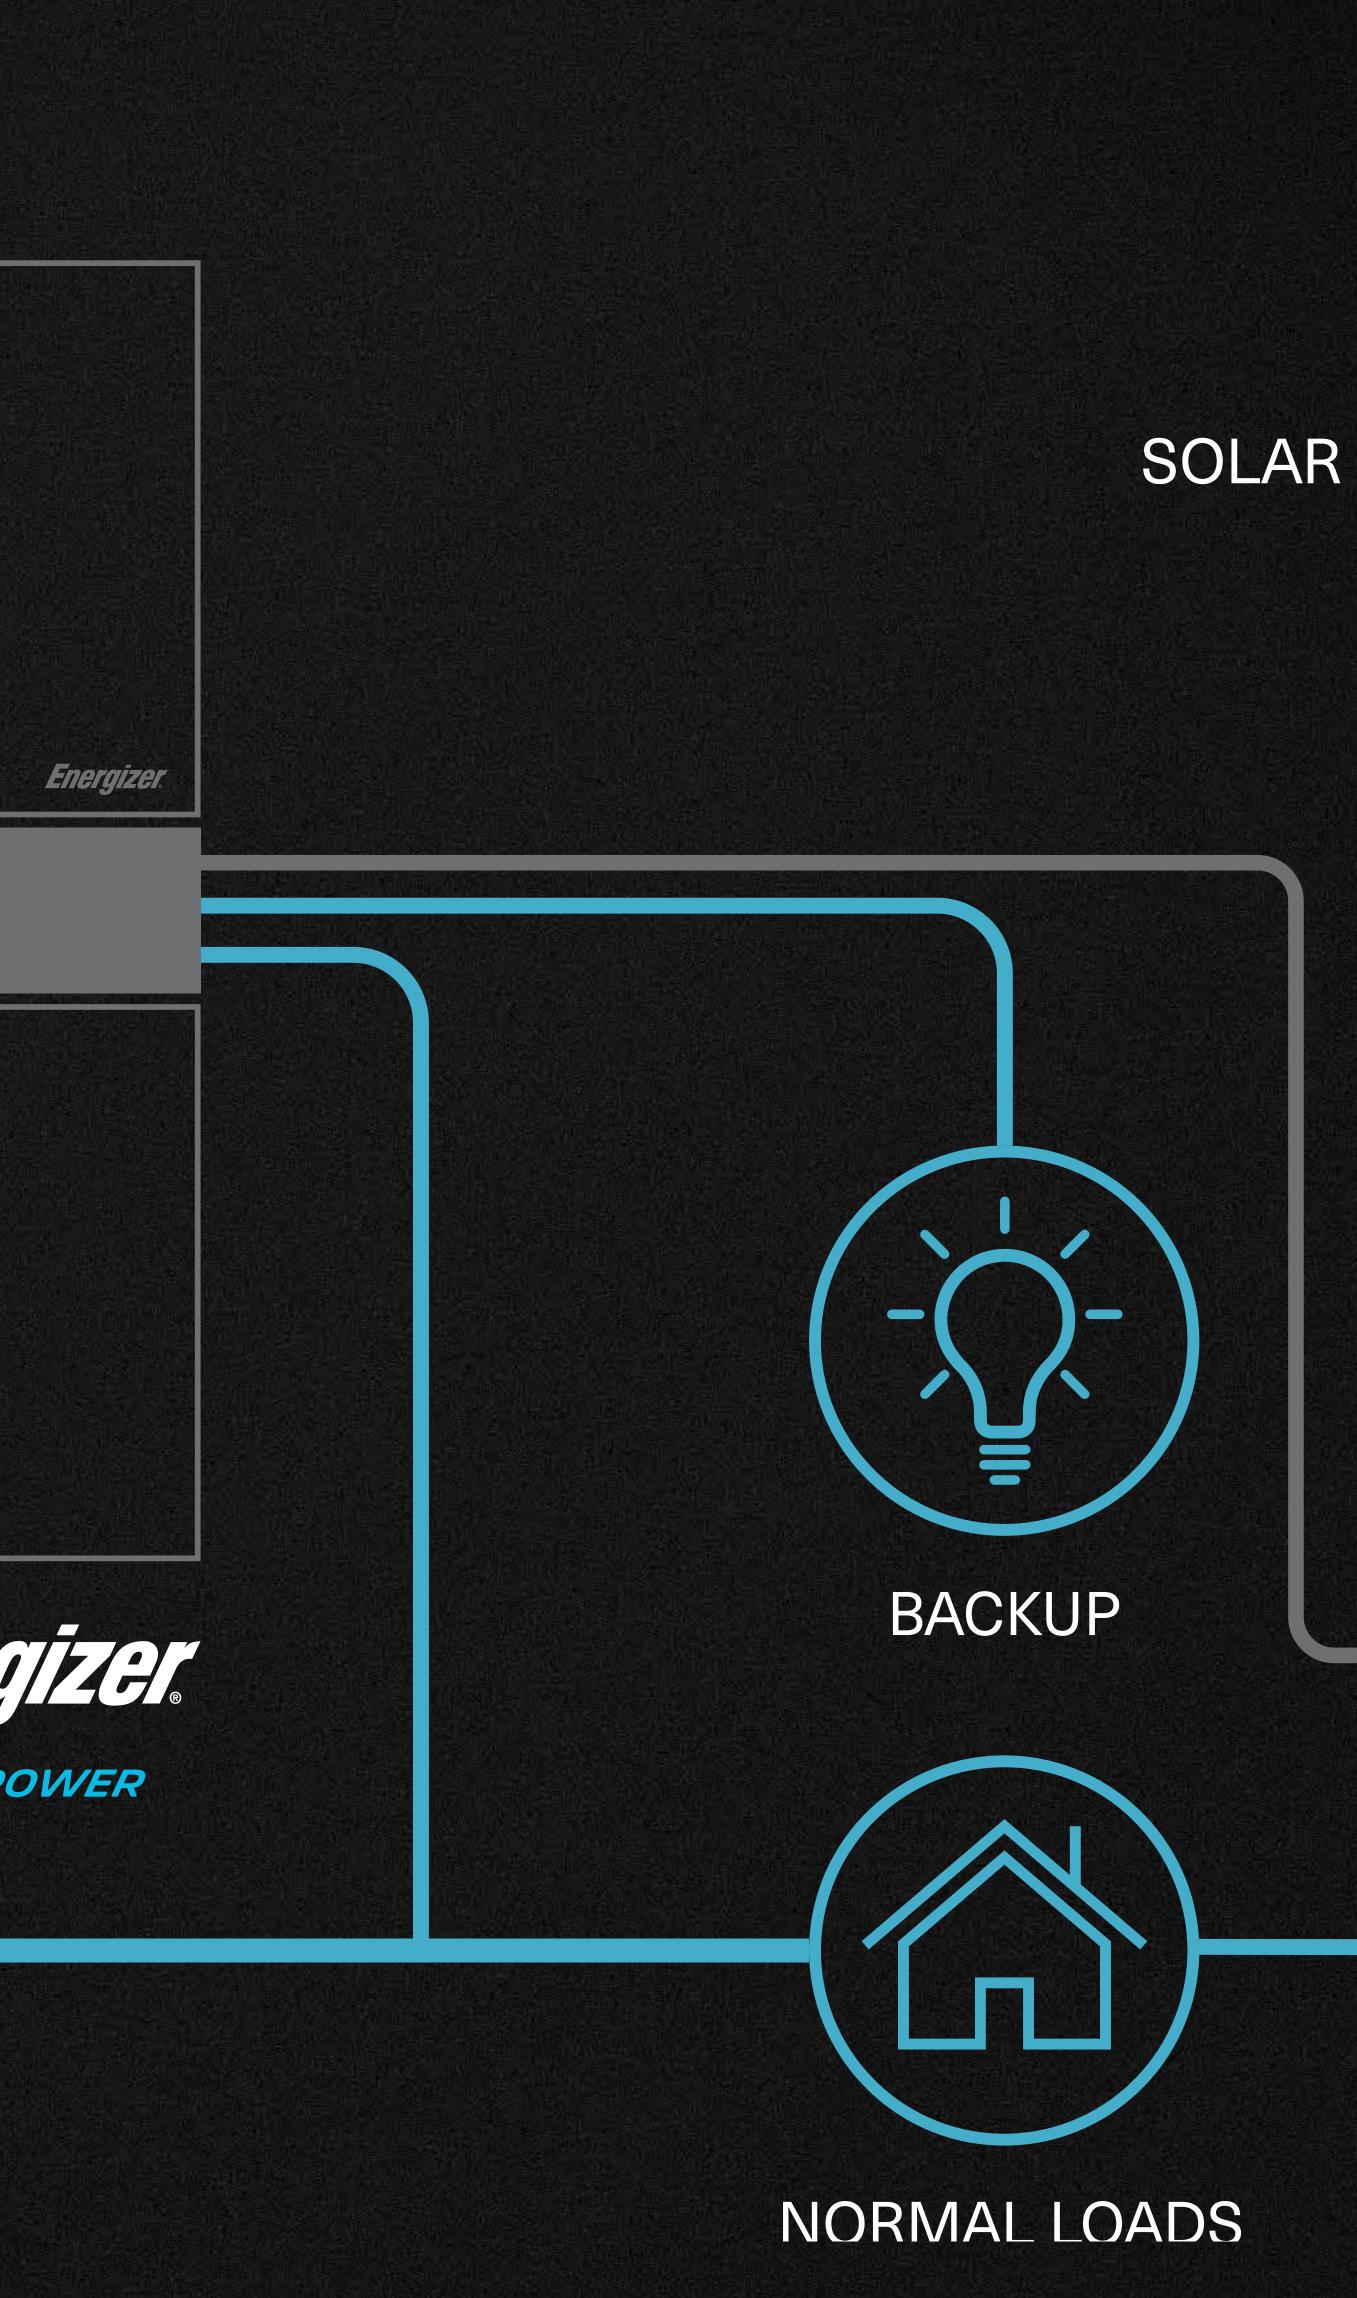

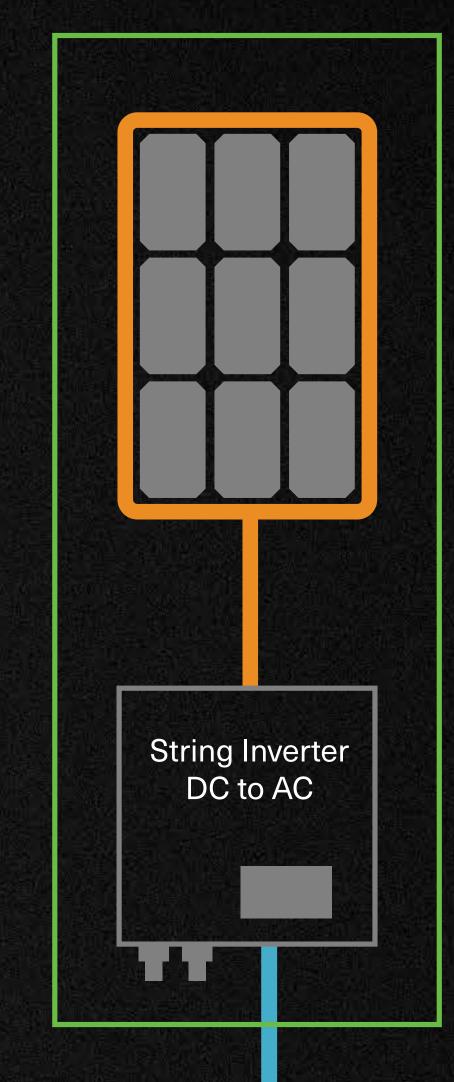

CT Length: 10m Max Length: 100m

PV CT

V21 - 02005

Technical Specifications: HP-6M

Inverter Specifications

Nominal AC Voltage	230V
AC Input Voltage Range	180V - 26
Max AC Output Current	16A
Rated AC Power (Grid)	3600W
Rated AC Power (Backup)	3600W
Max Charge / Discharge Power	3600W
Output Frequency (AC)	50 / 60 H
Power Factor Nominal Range	0.8 lead to
AC Overvoltage Category	Π
Max Inverter Efficiency	94.00%
DRED Device Support	DRM 0-8
Cooling Method	Natural C

Battery Specifications

Nominal DC Voltage	51.2V
Battery Energy	6.14kWh
Max Continuous Battery Charge Current	71A DC
Max Continuous Battery Discharge Current	71A DC
Battery Chemistry	LiFePO ₄
Rated Capacity	120Ah
Cell Type	Prismatic
Cycle Life	10,000
DOD (Depth of Discharge)	95%
Protective Class	
DC Overvoltage Category	
Circuit Protection	Integrate
Max DC Voltage	58.4V
Short Circuit Current	8500A

65V

to 0.8 lag

Convection

Environmental Working Conditions

Ambient Temperature **Relative Humidity** Ingress Protection Maximum Altitude

Physical Specifications

Dimensions Case Material Mounting Method Net Weight

Communication

Internet Connection Customer Access Installer Access **Technician Access**

Certification

Battery & BMS Transport UPS Electromagnetic Compatibility Grid Compliance

Warranty

Lifespan Cycle Life

ed 80A Magnetic / Thermal Trip Protection


Charge: 0°C to 45°C / Discharge: -20°C to 50°C 0 to 95% **IP65** 2,000m

1244mm H x 420mm W x 183mm D Steel (Powder coated) / Aluminium (Anodised) Wall Mounted 98.5kg

Cellular / WiFi / Ethernet Web Portal / iOS App / Android App / LCD Panel Installer App with direct connection via Bluetooth LCD Touchscreen Control Panel / Remote Access

IEC 62619:2017 UN 38.3 AS 62040.1:2019 IEC 61000-2/-3 AS/NZS 4777.2:2015

10 Years 10,000

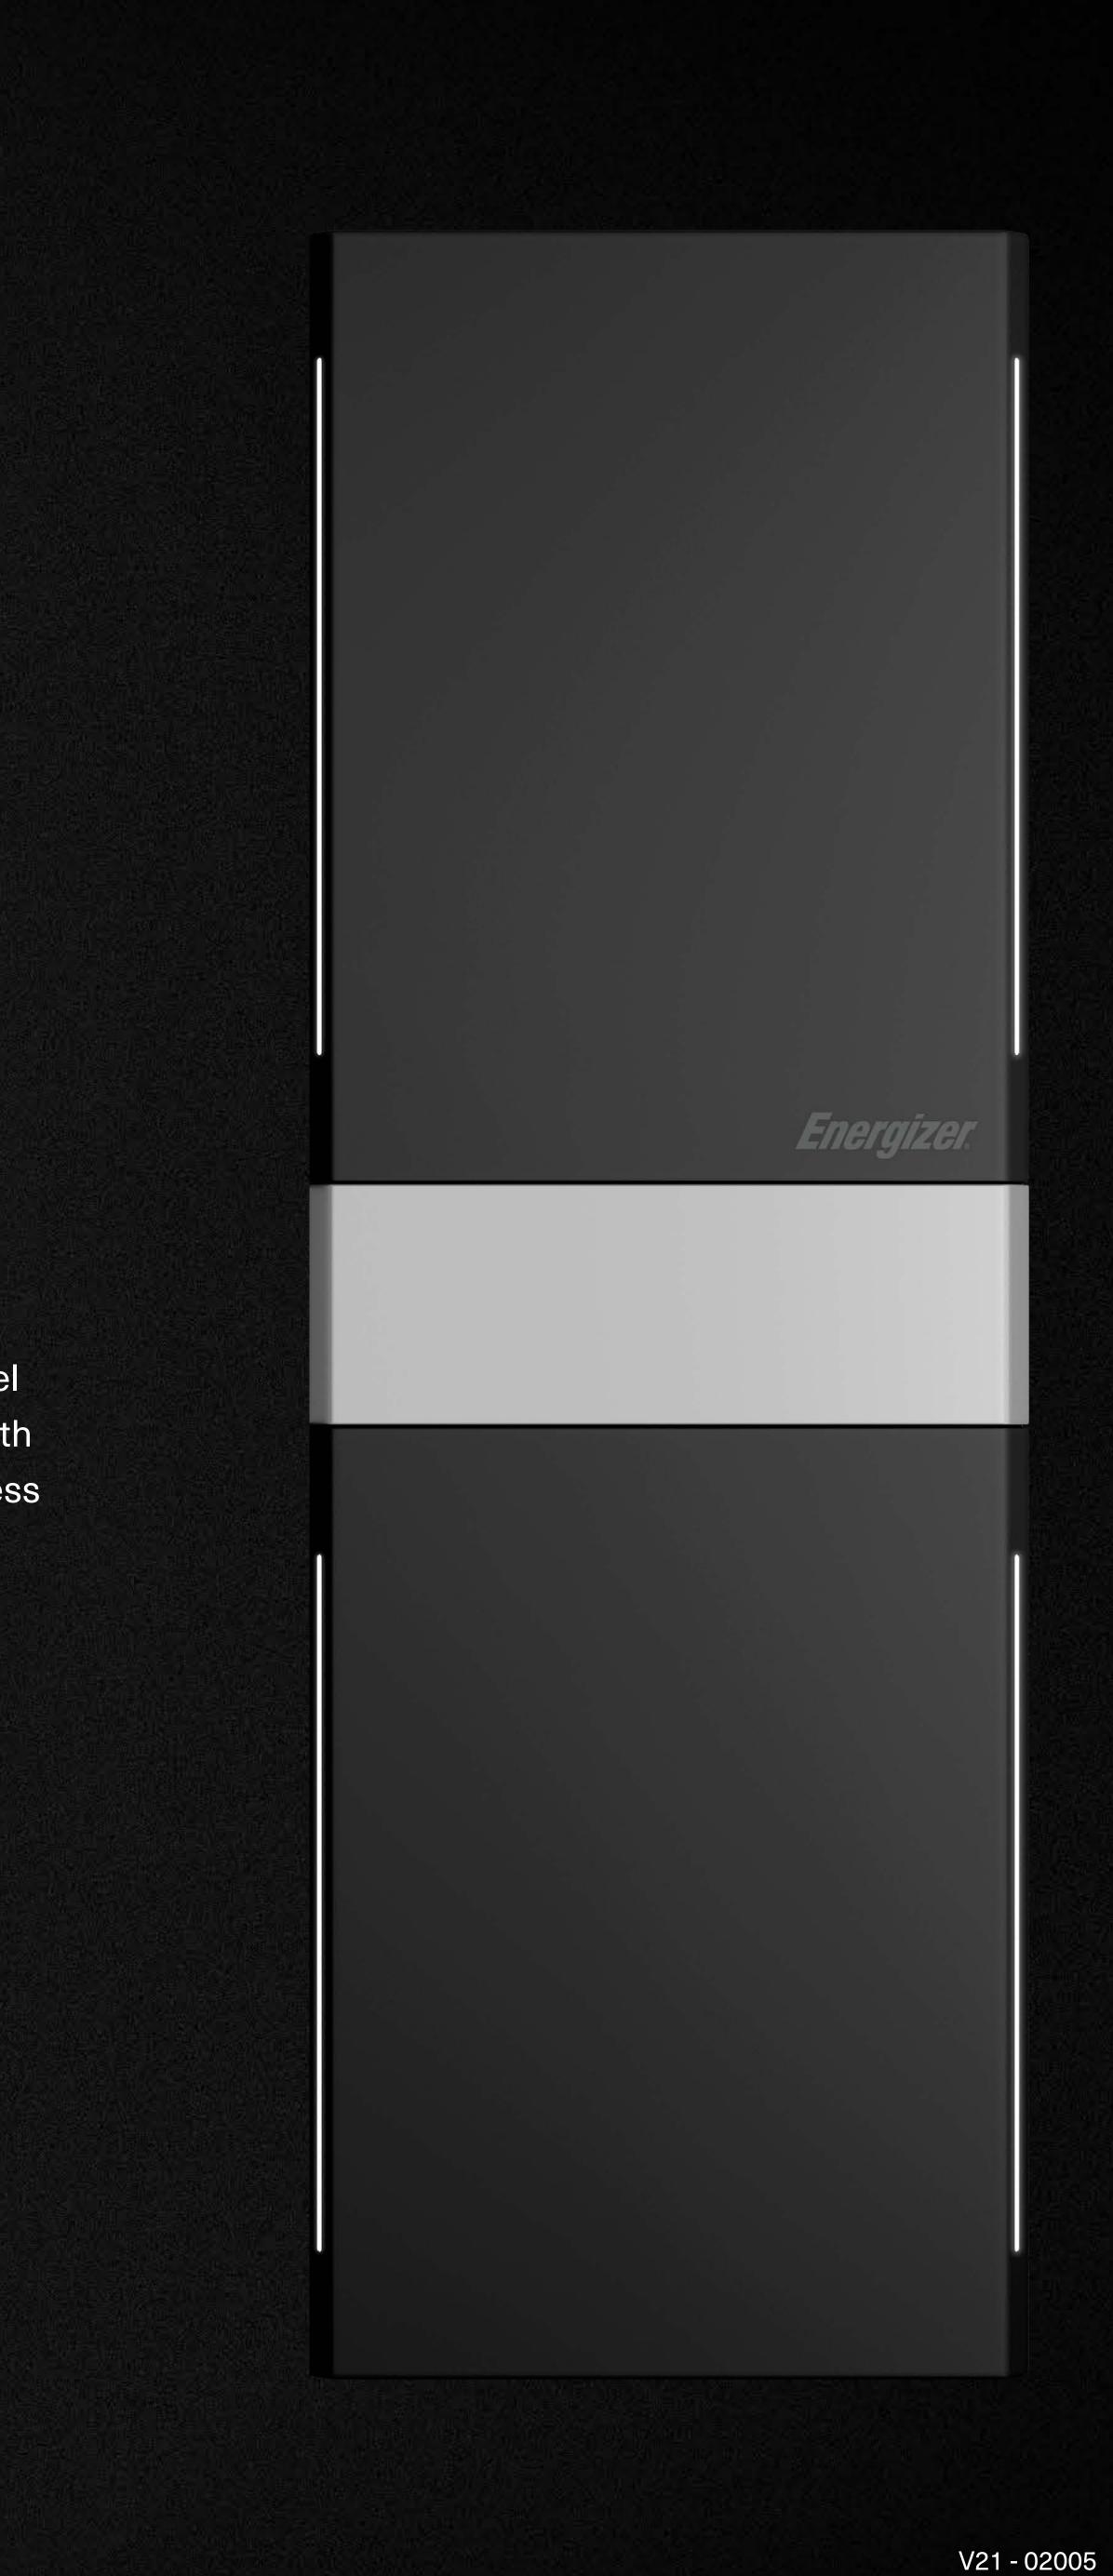

Technical Specifications: HP-65

Battery Specifications

Nominal DC Voltage	51.2V
Battery Energy	6.14kWh
Max Continuous Battery Charge Current	71A DC
Max Continuous Battery Discharge Current	71A DC
Battery Chemistry	LiFePO ₄
Rated Capacity	120Ah
Cell Type	Prismatic
Cycle Life	10,000
DOD (Depth of Discharge)	95%
Protective Class	
DC Overvoltage Category]
Circuit Protection	Integrate
Max DC Voltage	58.4V
Short Circuit Current	8500A

Environmental Working Conditions

Ambient Temperature	(
Relative Humidity	(
Ingress Protection	
Maximum Altitude	2

0 to 95% IP65 2,000m



Contact Us: energizerhomepower.com info@energizerhomepower.com

HP-6 Series

Energy Rating (kWh) Usable Energy (kWh) Capacity (Ah) Dimensions (H/W/D; mm) Weight (kg)



Physical Specifications

Dimensions Case Material Mounting Method Net Weight

Certification

Battery & BMS Transport Electromagnetic Compatibility

Warranty

Lifespan Cycle Life

HP-6M / 1S

12.28 11.6 240 1244/646/183 168.5

© 2021 Energizer. Energizer and certain graphic designs are trademarks of Energizer Brands, LLC and related subsidiaries and are used under license by 8 Star Energy Pty Ltd. All other brand names are trademarks of their respective owners. Neither 8 Star Energy Pty Ltd nor Energizer Brands, LLC is affiliated with the respective owners of their trademarks.

ed 80A Magnetic / Thermal Trip Protection

Charge: 0°C to 45°C / Discharge: -20°C to 50°C

1244mm H x 222mm W x 183mm D Steel (Powder coated) / Aluminium (Anodised) Wall Mounted 70kg

IEC 62619:2017 UN 38.3 IEC 61000-2/-3

10 Years 10,000

HP-6M / 2S

18.42 17.3 360 1244/872/183 238.5

HP-6M / 3S

24.56 23.2 480 1244/1098/183 308.5

